


# Unwinding unit OF 101

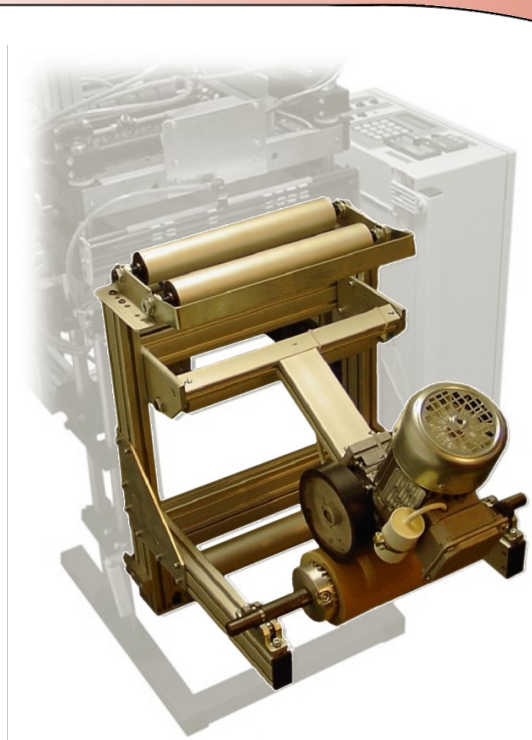

## TECHNICAL DATA

Maximum speed	80m/min
Maximum width of the input foil	250-1500mm
Dimensions of the machine (LxWxH)	850x400-1500x1200mm
Weight	50kg
Power supply	3x400V, 50Hz
Power demand	550VA

## USE


The rewinding unit is designed for smooth supplying of welding machines with polyethylene foil with optional widths from 250 to 1500mm.

## FUNCTION

The equipment consists of carriers of foil that is wound on a hollow, and adjustable cones clamping them to the unwinding rod. A sliding electric motor, pushed by a rubber-coated wheel to the foil ensures filling of the following roller compensator. Its filling is detected by a contact-free sensor that provides a contact-free control of run of the motor. The customer only specifies maximum speed of feeding of the foil in the next machine and maximum width of the processed foil. Electric installation can be included in delivery of the machine or it can be completely separate.

## ADVANTAGES

Automatic operation requires only attendance with replacement of rolls of the rewound foil.

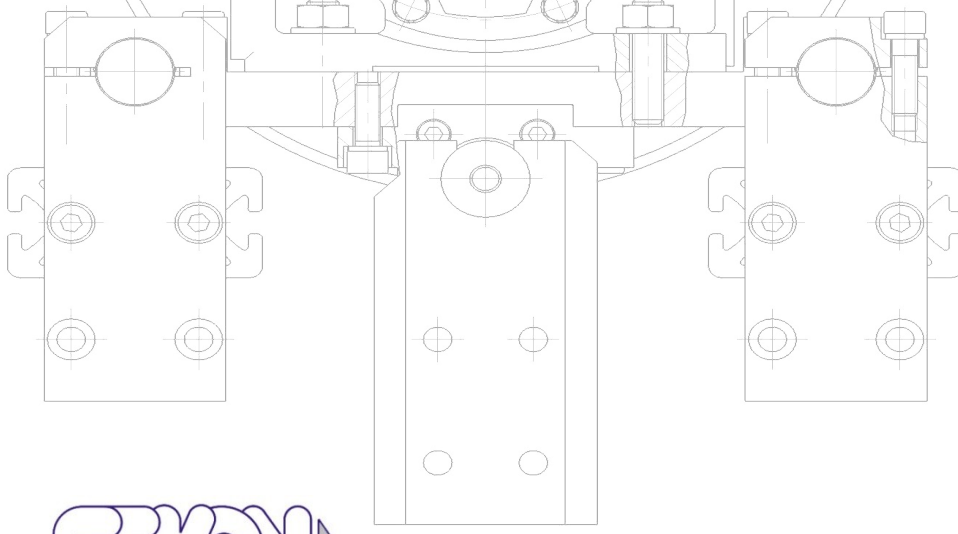

<sup>1</sup> Change of technical parameters reserved.